



SEEMATZ LED X Light Technical Overview



- Special high power, high efficient LED cluster light up to 160W
- variable field of view (spot to flood 4°-12° FWHM)
- Up to 1450m range and 150m field of view
- Infinity motion drive on horizontal axis
- ± 30 degree of motion on vertical axis
- 230V AC or 24V DC power input
- Variable speed control
- Strong seawater resistant aluminium housing, powdercoating
- L x W x H: 370 x 400 x 455mm



Pesch Marinescheinwerfer
Ortsring 2
D - 21423 Winsen/Luhe

Tel.: +49 4171 5684
E-Mail: sales@seematz.de
<https://www.seematz.de>



Introduces the LED X Light





Next Level of Performance and
Reliability



Pesch Marinescheinwerfer
Ortsring 2
D - 21423 Winsen/Luhe

Tel.: +49 4171 5684
E-Mail: sales@seematz.de
<https://www.seematz.de>

Introduces the LED X Light






focusable spot
from 4° to 12°

Narrow beam

- Luminous flux: up to 9600lm
- Luminous intensity: up to 2500kcd

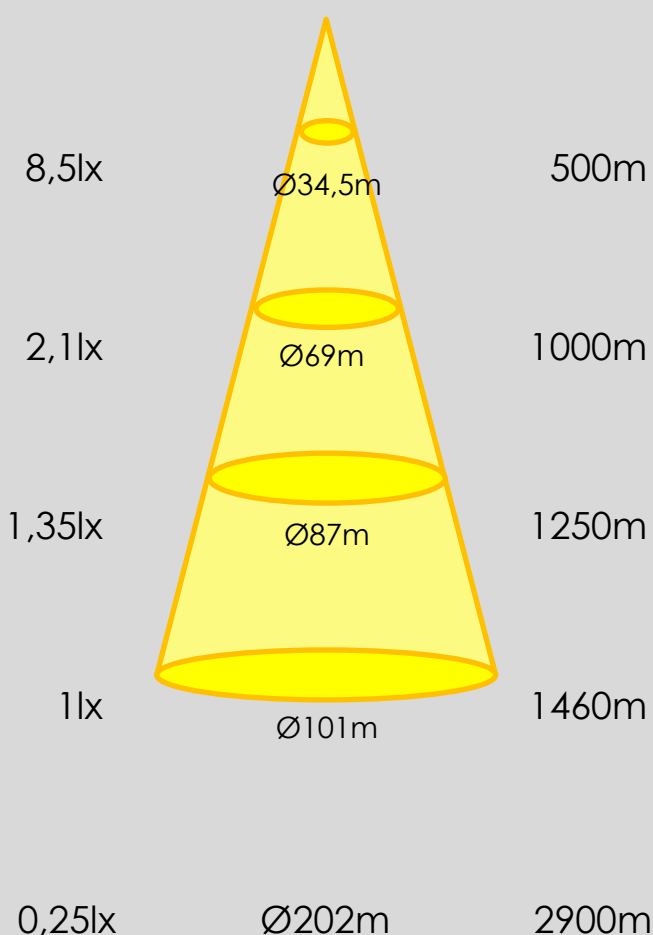

Wide beam

- Luminous flux: up to 21500lm
- Luminous intensity: up to 627kcd

